

ADAM-4016


ADAM-4017

1-ch Analog Input/Output Module

8-ch Analog Input Module



ADAM-4016

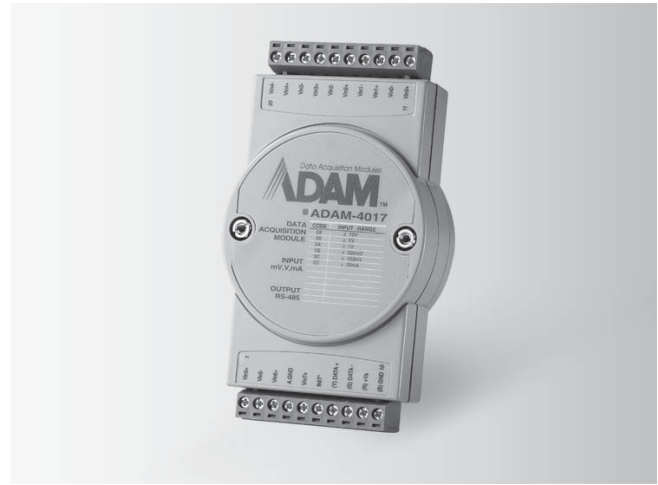

ADAM-4017



Specifications

General

- Connectors 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- Power Consumption 2.2 W @ 24 V_{DC}
- Watchdog Timer System (1.6 s)
- Supported Protocols ASCII command

Analog Input

- Channels 1 differential
- Input Impedance Voltage: 2 M Ω
Current: 125 Ω (Added by users)
- Input Type mV, V, mA
- Input Range ± 15 mV, ± 50 mV, ± 100 mV, ± 500 mV, ± 20 mA

Analog Output

- Channels 1
- Accuracy 0.05% of FSR
- Output Type V
- Output Range 0 ~ 10 V
- Drift ± 50 ppm/ $^{\circ}$ C
- Drive Current 30 mA
- Isolation Voltage 3,000 V_{DC}

Digital Output

- Channels 4, open collector to 30 V, 30 mA max. load
- Power Dissipation 300 mW

Common Specifications

General

- Power Input Unregulated 10 ~ 30 V_{DC}
- Connectors 2 x plug-in terminal block (#14 ~ 22 AWG)

Analog Input

- Accuracy Voltage mode: $\pm 0.1\%$ or better
Current mode: $\pm 0.2\%$ or better
- Resolution 16-bit

- Sampling Rate 10 sample/second (total)
- Isolation Voltage 3,000 V_{DC}
- CMR @ 50/60 Hz 120 dB
- NMR @ 50/60 Hz 100 dB
- Span Drift ± 25 ppm/ $^{\circ}$ C
- Zero Drift ± 6 μ V/ $^{\circ}$ C

Environment

- Humidity 5 ~ 95% RH
- Operating Temp. -10 ~ 70 $^{\circ}$ C (14 ~ 158 $^{\circ}$ F)
- Storage Temp. -25 ~ 85 $^{\circ}$ C (-13 ~ 185 $^{\circ}$ F)

Specifications

General

- Power Consumption 1.2 W @ 24 V_{DC}
- Watchdog Timer System (1.6 second)
- Supported Protocols ASCII command

Analog Input

- Channels 6 differential and 2 single-ended
- Input Type mV, V, mA
- Input Range ± 150 mV, ± 500 mV, ± 1 V, ± 5 V, ± 10 V, ± 20 mA

Ordering Information

- ADAM-4016 1-ch Analog Input/Output Module
- ADAM-4017 8-ch Analog Input Module

1	Motion Control
2	Hazardous Location
3	Energy Automation
4	Building Automation Systems
5	Automation Software
6	Operator Panels
7	Automation Panel PCs
8	Industrial Monitors
9	Industrial Ethernet
10	Device Servers & Gateways
11	Serial Communication Cards
12	Embedded Auto. Computers
13	PACs
14	M2M I/O
15	Distributed Nano Controllers
16	RS-485 I/O
17	Ethernet I/O
18	DAQ Boards